

CloudDC A+ Server AS -1115CS-TNR

1U CloudDC with 10 hot-swap 2.5" NVMe/SAS/SATA bays and 2 PCIe 5.0 x16 slots + 2 AIOM slots




More details here

Key Applications


Web Server, Firewall Application, Data Center Optimized, Value IaaS, Cloud Computing, Compact Server, DNS & Gateway Servers, Firewall Application, CDN, Edge Nodes,

Key Features

- Single 4th Generation AMD EPYC™ 9004 Series Processors;
- 2 PCIe 5.0 x16 FHHL;
- Dual AIOM with NCSI (OCP 3.0) for networking, 1 dedicated IPMI LAN;
- 10x 2.5" hot-swap hybrid NVMe/SATA/SAS drive bays;
- 860W redundant Platinum level 100-240Vac and 200-240 Vdc power supplies;(*Full redundancy based on configuration and application load);
- 2 On-board PCIe 3.0 x2 M.2 NVMe 80mm/110mm (Boot);

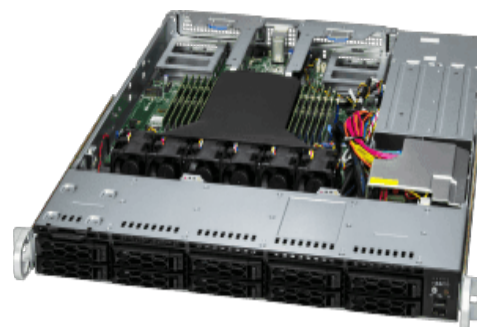


Form Factor	1U Rackmount Enclosure: 437 x 43 x 597mm (17.2" x 1.7" x 23.5") Package: 605 x 197 x 822mm (23.8" x 7.8" x 32.4")
Processor	Single Socket SP5 AMD EPYC™ 9004 Series Processors Up to 128C/256T
GPU	Max GPU Count: Up to 2 single-width GPU(s) Supported GPU: NVIDIA PCIe: L4, A2 CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: 12 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 10 bay(s) • 10 front hot-swap 2.5" NVMe*/SAS*/SATA drive bay(s) (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 3.0 x2 NVMe slot(s) (M-key 2280/22110)
Expansion Slots	Default • 2 PCIe 5.0 x16 FHHL slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible)
On-Board Devices	Chipset: System on Chip Network Connectivity: Via Slim-AIOM IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s) USB: 2 USB 3.0 port(s) (rear) 2 USB 2.0 port(s) (front) Video: 1 VGA port(s) Serial: 1 COM port(s) (Rear) TPM: 1 TPM header

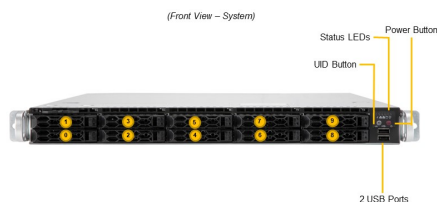

Slot	Description
1	2.5" Hot-Swap NVMe/SAS/SATA Drive Bays

*NVMe and SAS support requires additional parts in optional parts list

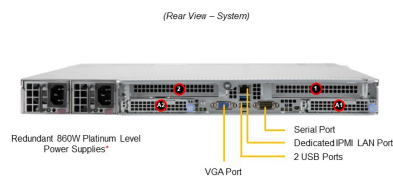

Slot	Description
1	PCIe 5.0 x16 (FHHL) Slot
2	PCIe 5.0 x16 (FHHL) Slot
3	PCIe 5.0 x16 AOCM Slot (NCSS)
4	PCIe 5.0 x16 AOCM Slot

*Full redundancy based on configuration and application load

System Cooling	Fans: 6x 4cm heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud(s)
Power Supply	860W Redundant Platinum Level power supplies Note: AS -1115CS-TNR-EU (European) SKU uses PWS-861A-1R (Titanium Level)
System BIOS	BIOS Type: AMI 32MB SPI Flash ROM BIOS Features: ACPI 6.4 Plug and Play (PnP) SMBIOS 3.5 or later UEFI 2.8 USB Keyboard support
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); SuperDoctor® 5; Super Diagnostics Offline ; KVM with dedicated LAN ; IPMI 2.0
PC Health Monitoring	FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: System temperature, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, CPU thermal trip support
Dimensions and Weight	Weight: Gross Weight: 46 lbs (20.9 kg) Net Weight: 25 lbs (11.3 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super H13SSW
Chassis	CSE-LB16TS-R860AWP-A